


## Configuration of ADSL Modem NETGEAR Model D1500

Open modem page <http://192.168.1.1>

Enter Username : admin

Enter Password : password


You will get screen as below-

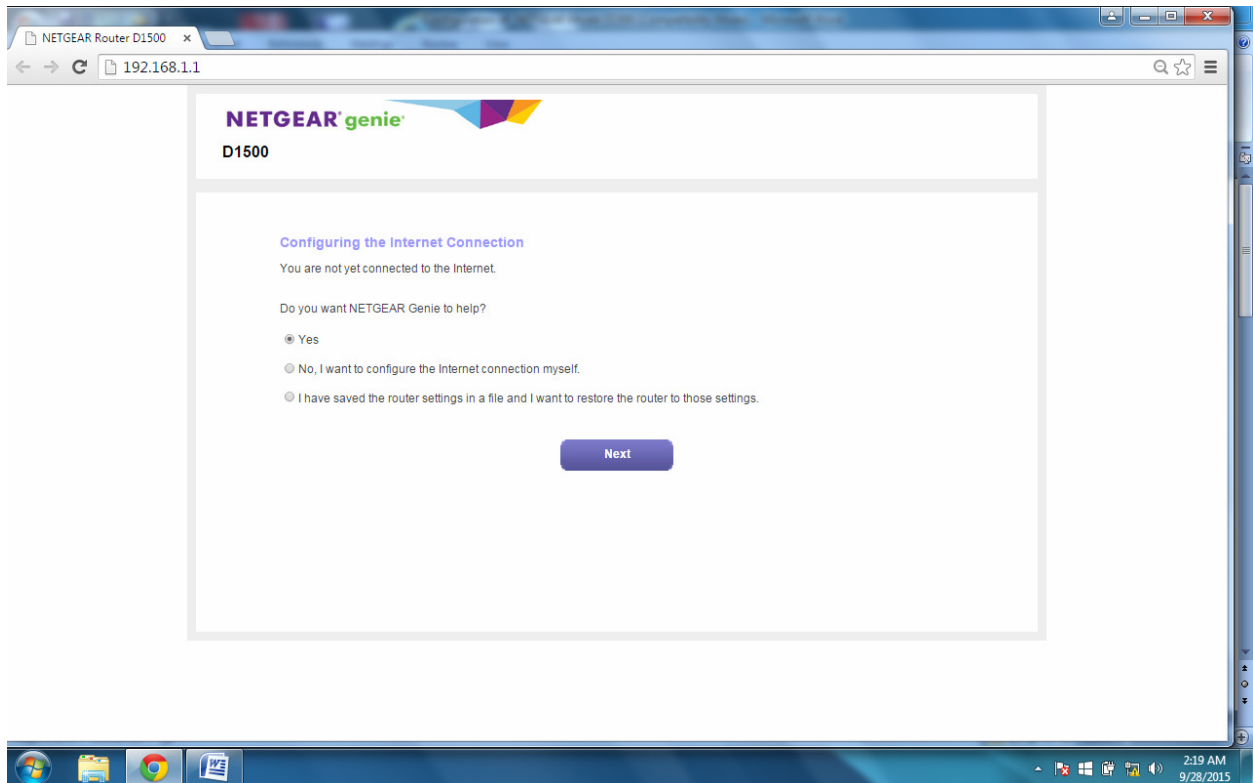

Select No, I want to configure the Internet connection myself.


Click Next Button

You will get screen as below-

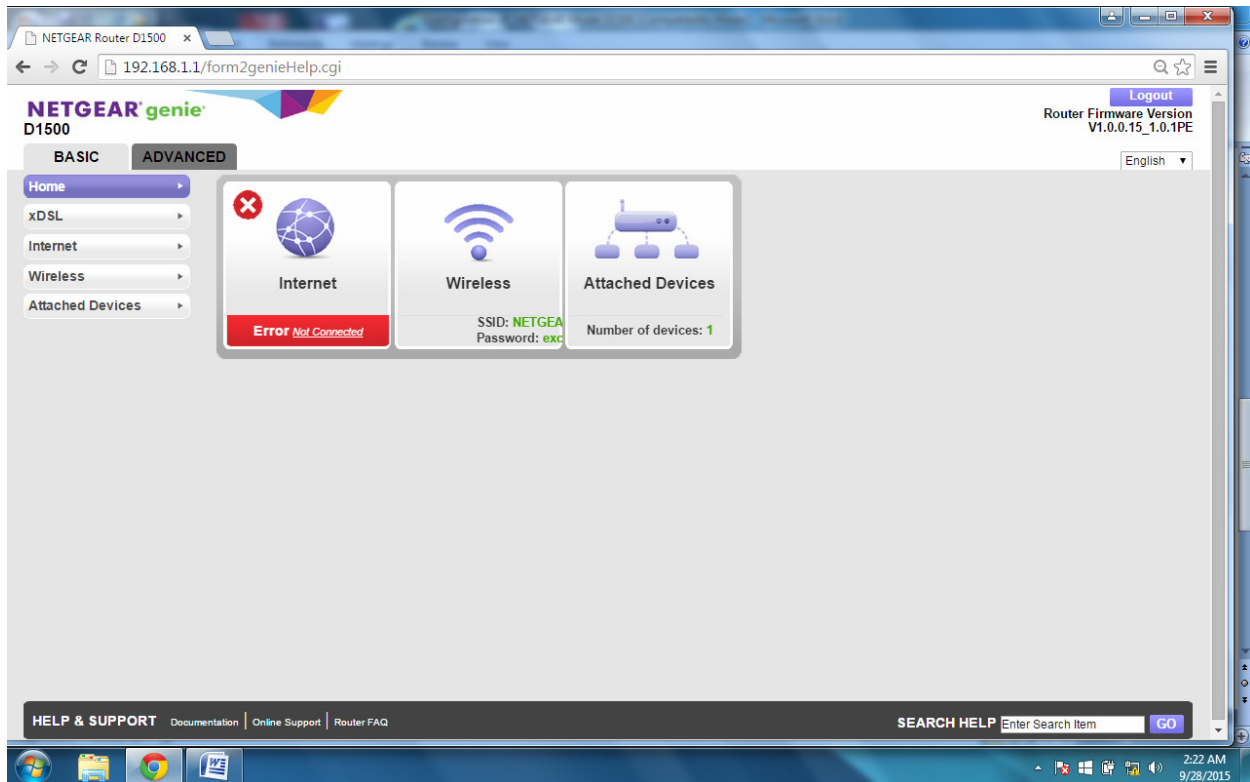

Click on xDSL

You will get screen as below-

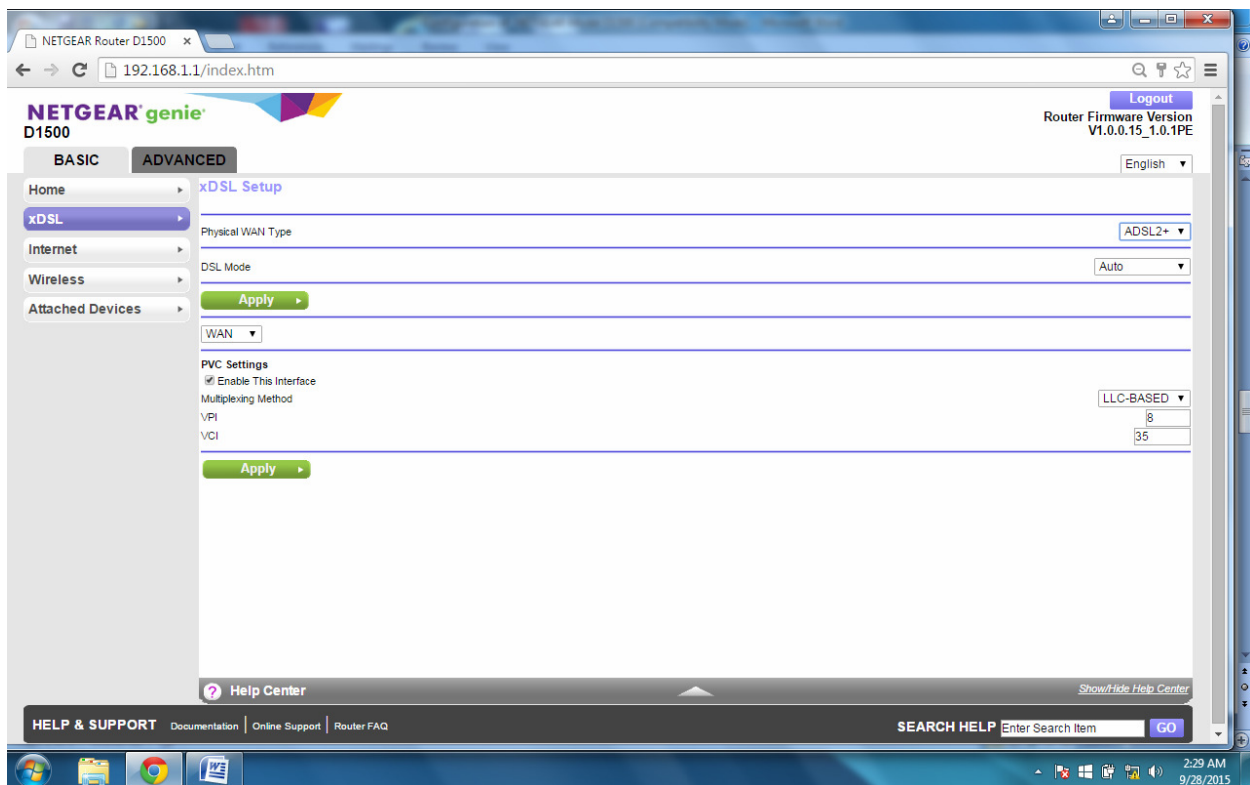


Change the values of as

VPI 0 and VCI 32


Click on Apply Button

You will get screen as below-

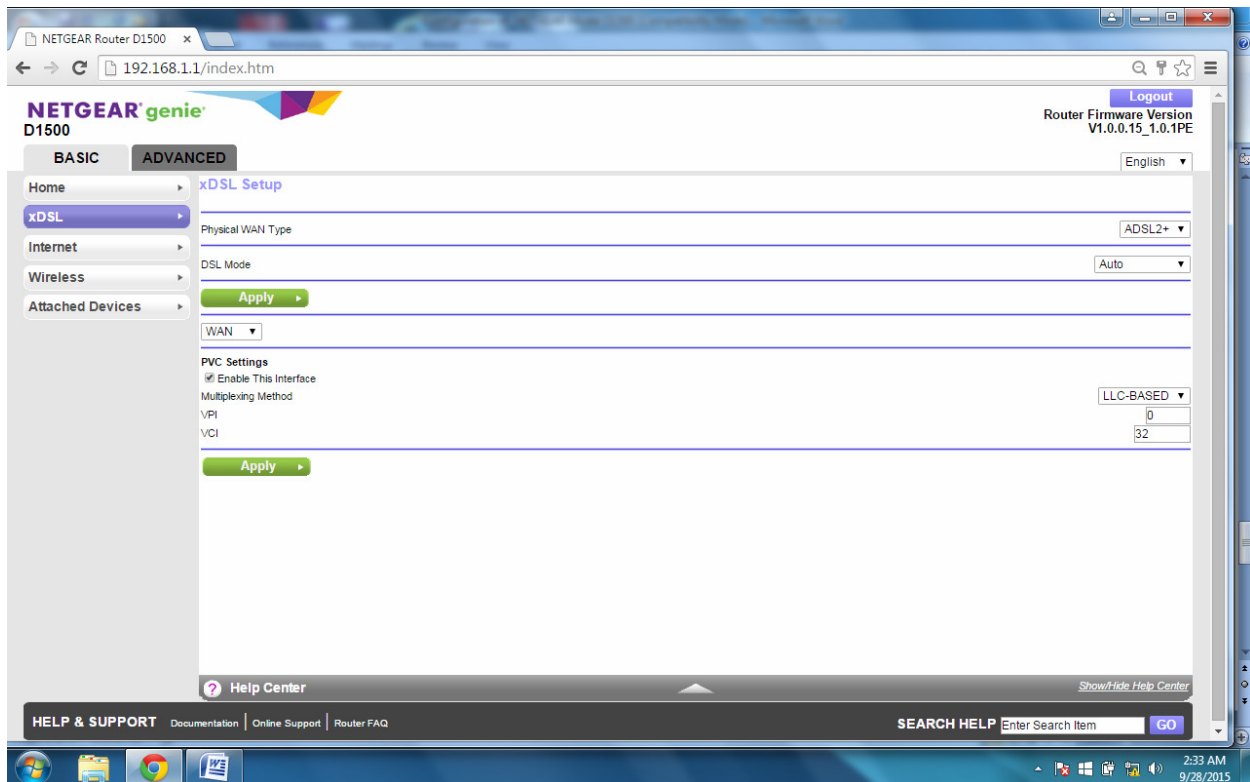

Click on Internet

You will get screen as below-

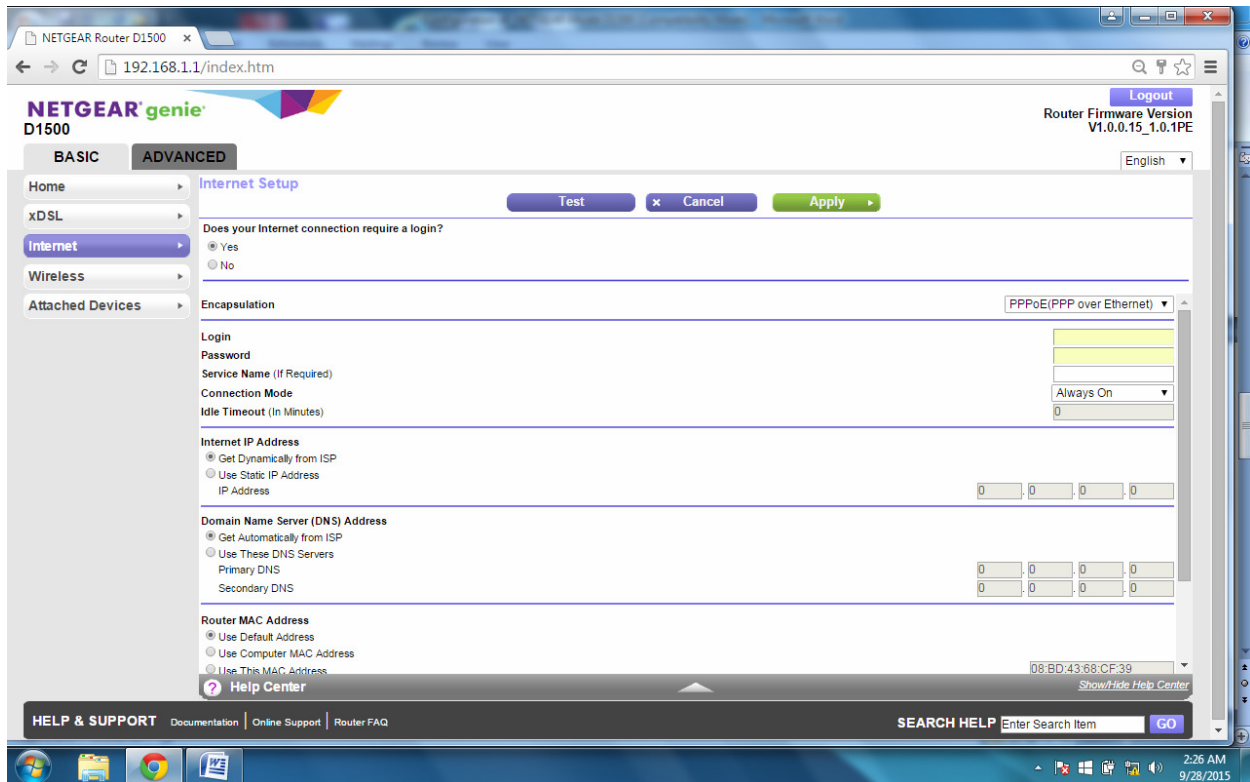

Enter Telephone No. in Login check box


Enter CA no. in Password check box

Select Use These DNS Servers

Enter any two DNS [ 1) 59.185.3.10 2) 59.185.3.11, 3) 59.185.3.12 4) 59.185.0.23 5) 59.185.0.50


Click on Apply Button [ which is on right side top ]

You will get screen as below-

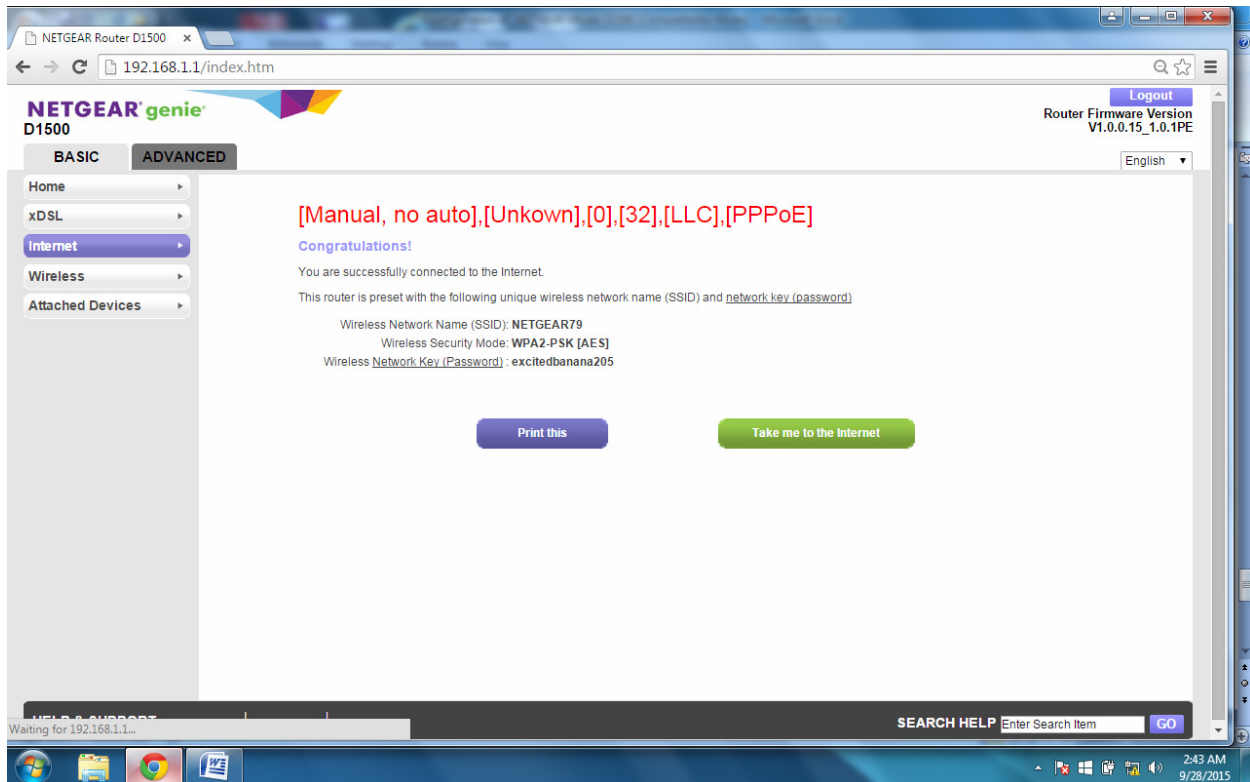


Click on Advance

You will get screen as below-

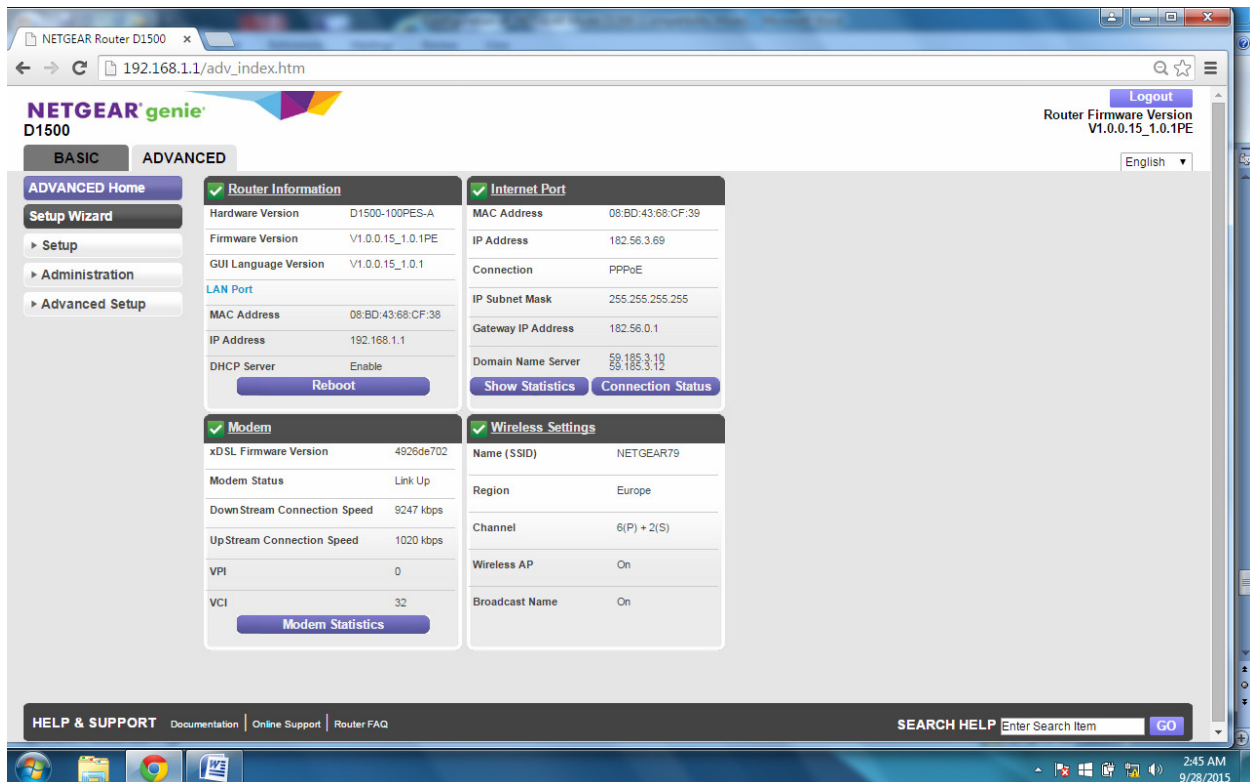

Click on Administration

Click on backup Setting

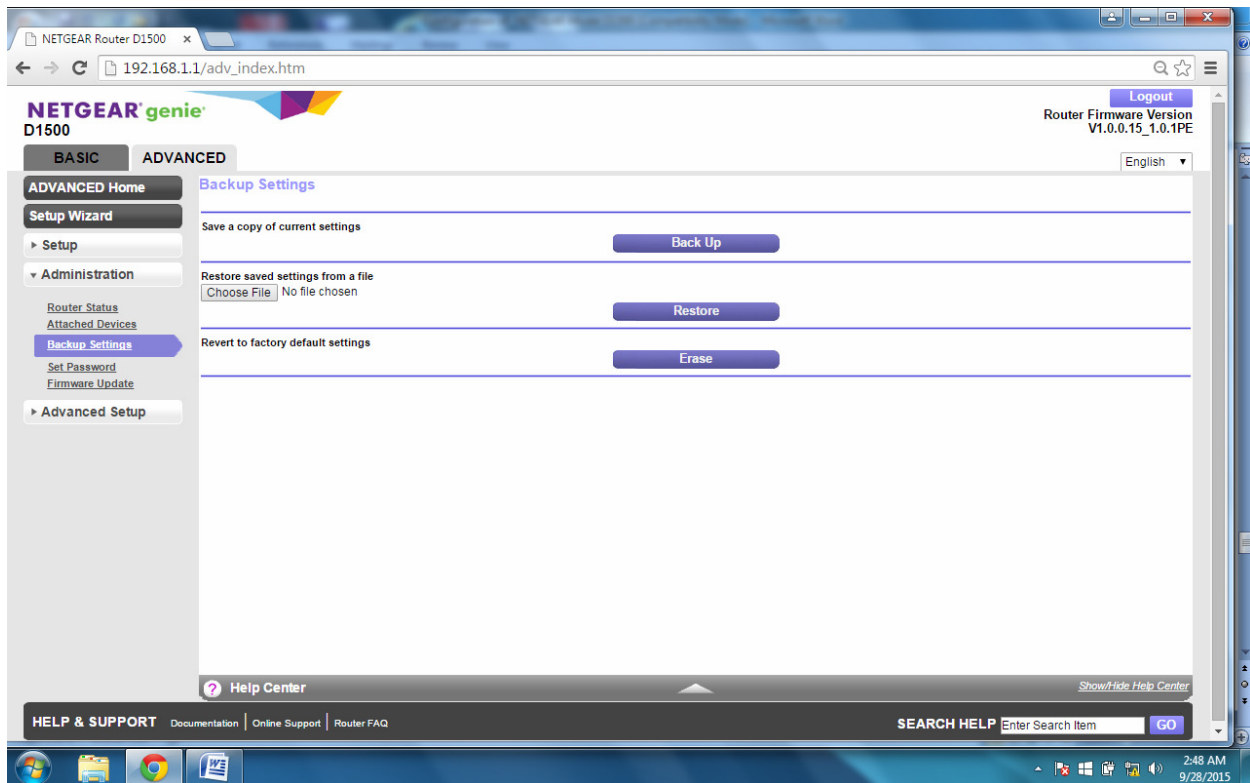

Click on Backup Button

Now setting is saved in your Modem and getting Internet.

NETGEAR Router D1500 x New Tab x  
 192.168.1.1/adv\_index.htm

**NETGEAR genie**  
 D1500

Logout  
 Router Firmware Version V1.0.0.15\_1.0.1PE  
 English

**BASIC** **ADVANCED**

**ADVANCED Home**  
**Setup Wizard**  
 Setup  
 Administration  
 Advanced Setup

**Router Information**

|                      |                   |
|----------------------|-------------------|
| Hardware Version     | D1500-100PES-A    |
| Firmware Version     | V1.0.0.15_1.0.1PE |
| GUI Language Version | V1.0.0.15_1.0.1   |

**LAN Port**

|             |                   |
|-------------|-------------------|
| MAC Address | 08:BD:43:68:CF:38 |
| IP Address  | 192.168.1.1       |
| DHCP Server | Enable            |

Reboot

**Internet Port**

|                    |                            |
|--------------------|----------------------------|
| MAC Address        | 08:BD:43:68:CF:39          |
| IP Address         | 182.56.3.69                |
| Connection         | PPPoE                      |
| IP Subnet Mask     | 255.255.255.255            |
| Gateway IP Address | 182.56.0.1                 |
| Domain Name Server | 59.185.3.10<br>59.185.3.12 |

Show Statistics Connection Status

**Modem**

|                             |           |
|-----------------------------|-----------|
| xDSL Firmware Version       | 4926de702 |
| Modem Status                | Link Up   |
| DownStream Connection Speed | 9247 kbps |
| UpStream Connection Speed   | 1020 kbps |
| VPI                         | 0         |
| VCI                         | 32        |

Modem Statistics

**Wireless Settings**

|                |             |
|----------------|-------------|
| Name (SSID)    | NETGEAR79   |
| Region         | Europe      |
| Channel        | 6(P) + 2(S) |
| Wireless AP    | On          |
| Broadcast Name | On          |

HELP & SUPPORT Documentation Online Support Router FAQ  
 SEARCH HELP Enter Search Item GO

2:51 AM  
 9/28/2015

Thanks

DE BB HD

MTNL Mumbai